


674 Series TSOP-II Socket


- Open top, Zero Insertion Force for automatic loading
- Highly reliable, pre-loaded contacts
- Live bug insertion
- Single point contact on package leads
- For 0.80mm and 1.27mm pitch packages

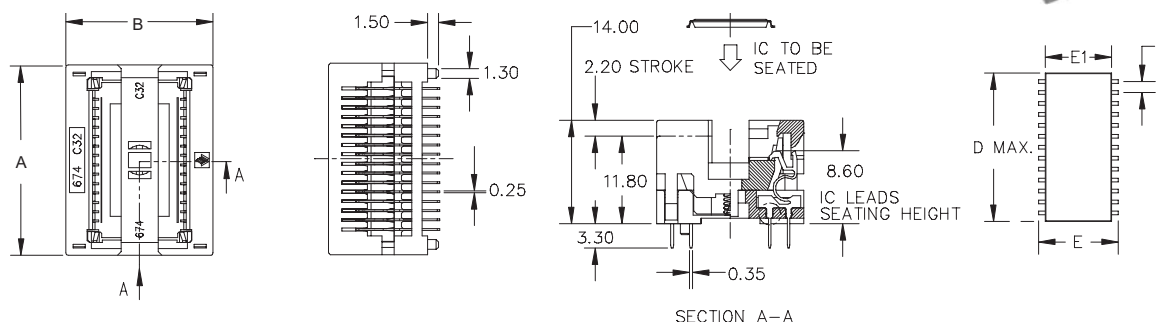

SECTION A-A

Lead Count	Pitch e (mm)	Package Dimensions (mm)			Part Number	Socket Dimensions (mm)	
		Width (E1)	Lead Tip to Tip (E)	Length (D)		Length (A)	Width (B)
20	1.27	7.62	9.22	17.30	674A0262015-E08	22.00	17.30
20	1.27	7.62	9.22	17.30	674A0262015-E09	22.00	17.30
24	1.27	7.62	9.22	17.30	674A0262415-E08	22.00	17.30
24	1.27	7.62	9.22	17.30	674A0262415-E09	22.00	17.30
26	1.27	7.62	9.22	17.30	674A0262215-E08	22.00	17.30
26	1.27	7.62	9.22	17.30	674A0262215-E09	22.00	17.30
28	1.27	10.20	11.80	18.40	674C0282215-E08	23.20	19.90
28	1.27	10.20	11.80	18.40	674C0282215-E11	23.20	19.90
32	1.27	10.20	11.76	20.94	674C0322215-E08	25.70	19.90
32	1.27	10.20	11.76	20.94	674C0322215-E11	25.70	19.90
40	0.80	10.20	11.76	18.40	674C1444015-E08	23.20	19.90
40	0.80	10.20	11.76	18.40	674C1444015-E11	23.20	19.90
44	0.80	7.62	9.22	18.41	674A1442115-E08	23.20	17.30
44	0.80	7.62	9.22	18.41	674A1442115-E11	23.20	17.30
44	0.80	10.16	11.76	18.40	674C1442115-E08	23.20	19.90
44	0.80	10.16	11.76	18.40	674C1442115-E11	23.20	19.90
44	0.80	10.20	11.80	20.80	674C1504415-E08	25.60	19.90
44	0.80	10.20	11.80	20.80	674C1504415-E11	25.60	19.90
50	0.80	10.20	11.80	20.80	674C1502215-E08	25.60	19.90
50	0.80	10.20	11.80	20.80	674C1502215-E11	25.60	19.90
54	0.80	10.16	11.76	22.40	674C1542215-E08	27.20	19.90
54	0.80	10.16	11.76	22.40	674C1542215-E11	27.20	19.90

DESCRIPTION & ORDERING INFORMATION

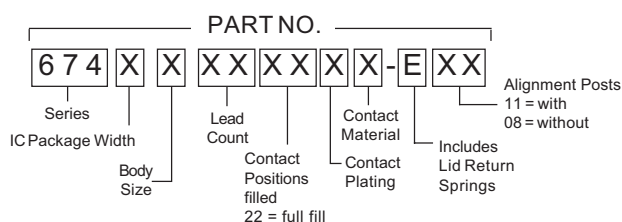

MATERIALS & SPECIFICATIONS

- Socket Body: PES, PEI, LCP or Equivalent
- Contact: Beryllium Copper Alloy
- Contact Plating: Gold over Nickel
- Contact Normal Force: 40 grams
- Contact Resistance: 50 mΩ
- Dielectric: 600V AC for 1 minute
- Temperature Rating: 150°C
- Insulation Resistance: 5,000 MΩ @ 500V DC
- Durability: 10,000 cycles min.