



689 Series SOP Dual Pinch Socket


- Open top, Zero Insertion Force for automatic loading
- Dual pinch; highly reliable contacts
- Accepts two 8 pin SOP packages
- Live bug insertion
- Accommodates 1.27mm pitch packages



PART NUMBER: 689-2161111

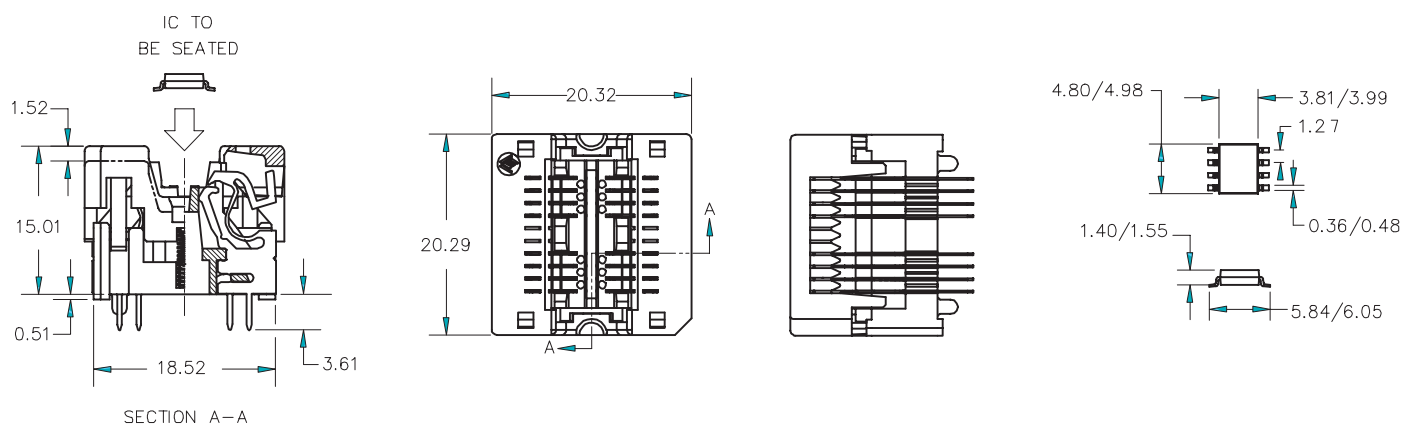

DESCRIPTION & ORDERING INFORMATION

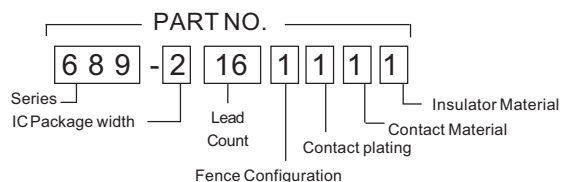

MATERIALS & SPECIFICATIONS

- Socket Body: PEI or Equivalent
- Contact: Beryllium Copper Alloy
- Contact Plating: Gold over Nickel
- Contact Normal Force: 30 grams
- Contact Resistance: 30 mΩ
- Dielectric: 600V AC for 2 minutes
- Temperature Rating: 150°C
- Durability: 5,000 cycles min.