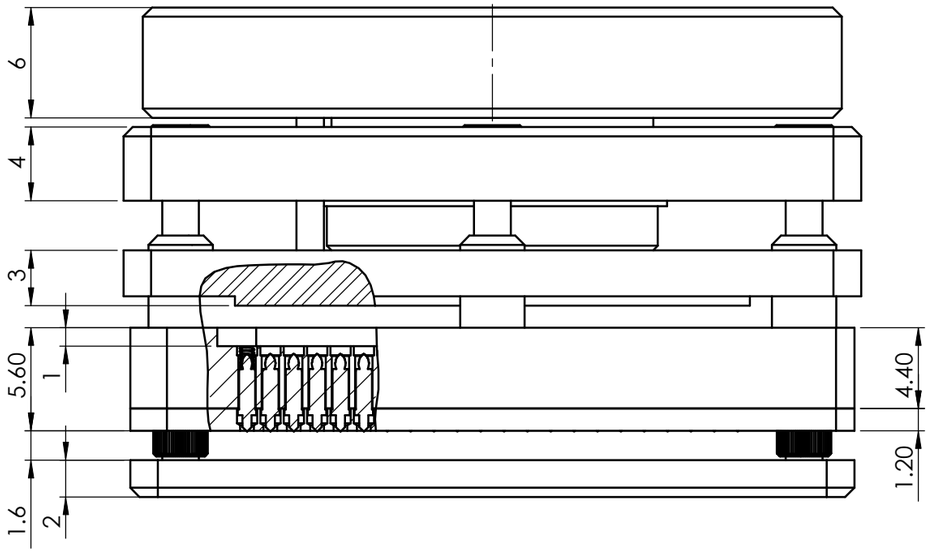

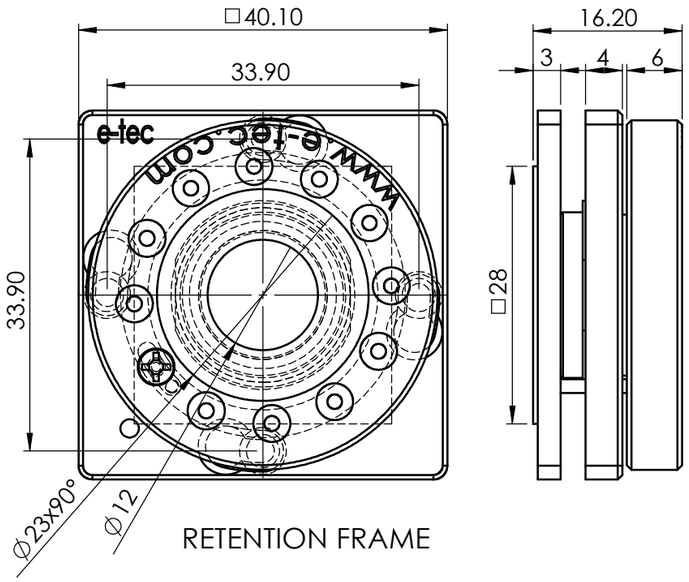

RETENTION FRAME

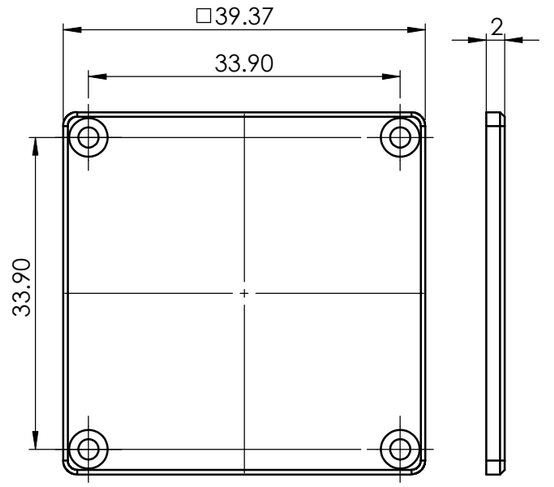

ASSEMBLY BOARD

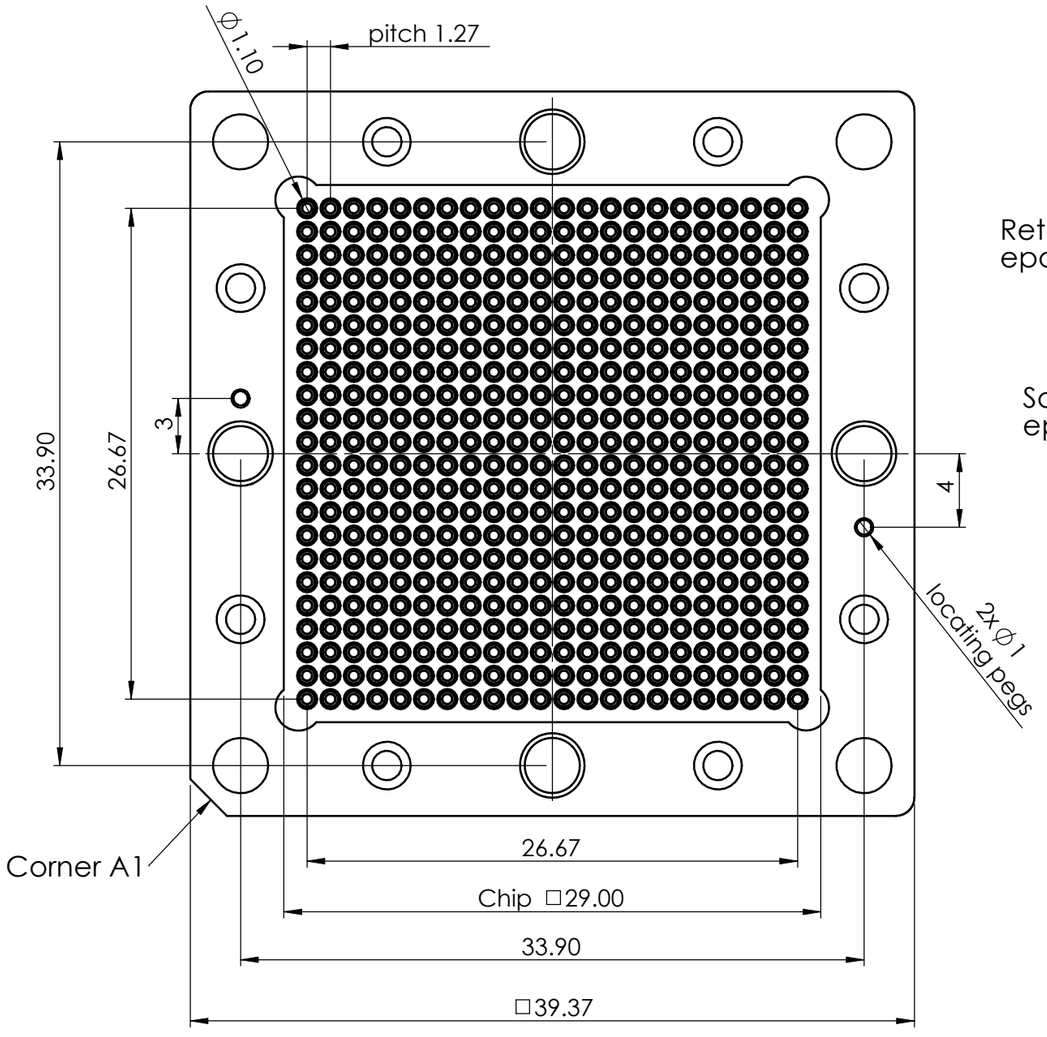

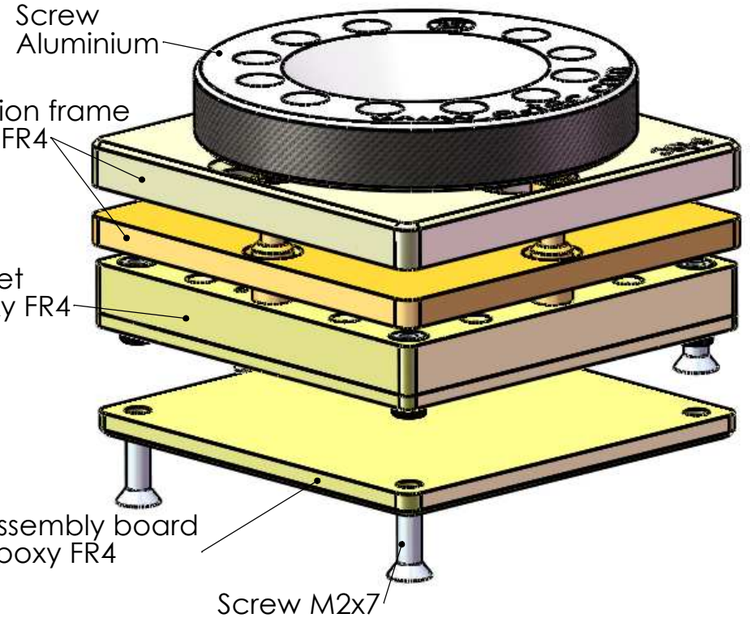

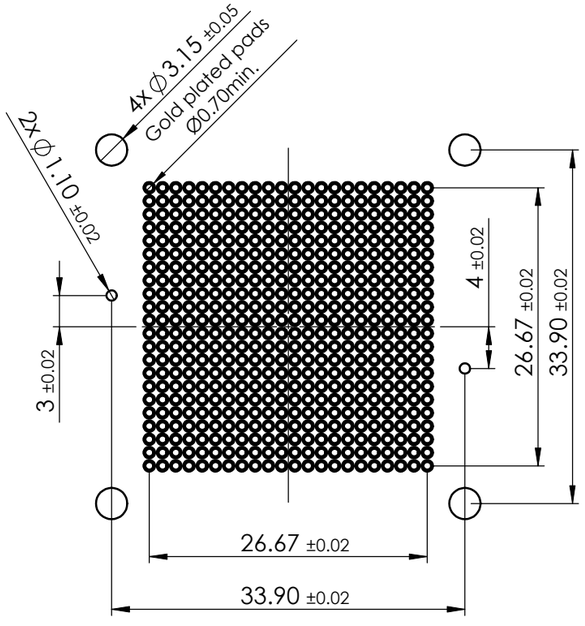

PCB LAYOUT

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
GENERAL TOLERANCES ISO 2768m

Remark: BGA FastLock socket, 484 pins, Pitch 1.27mm, matrix 22x22 Retention frame, Basic system 23

Patented		Visa	Date	Drawn by	Date	Visa
DRAWN		sme	22.06.2009	sme	22.06.2009	
CHK'D						
APPV'D		sme	22.06.2009			

Echelle: 3:1

MATERIAL: .

WEIGHT:

The information contained in this drawing is proprietary to Etec and shall not be reproduced or disclosed in whole or in part or used for any design or manufacture except whe such user possesses direct, written authorization from Etec

E-tec Interconnect www.e-tec.com

Designed and manufactured by **www.happ.ch**

"E-tec code" BCF484-1290-22AA55L A3H

"Production code" BCF0484-12-09282-22AAA-L 0 Revision

SHEET 2 OF 2

G:\Konstruktion\Dessins Solidworks\Dessins\BGA\BPF\BPF484\BPF0484-12-09282-22AAA-L\BPF0484-12-09282-22AAA-L