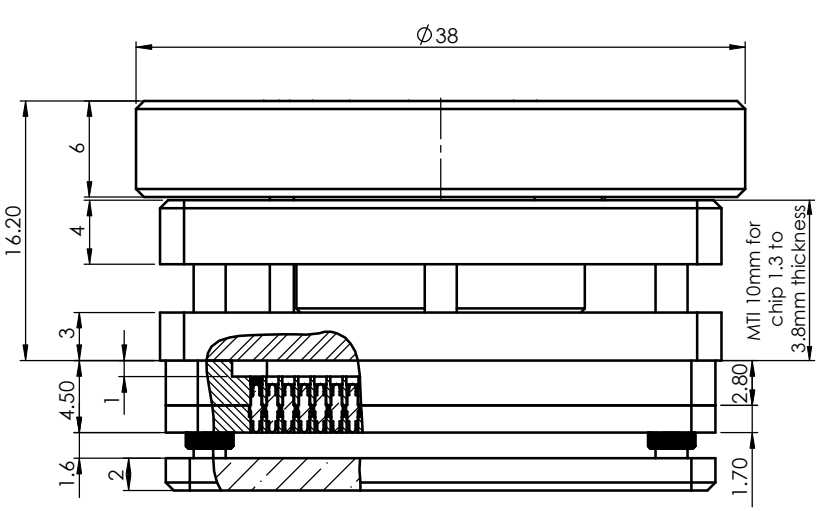

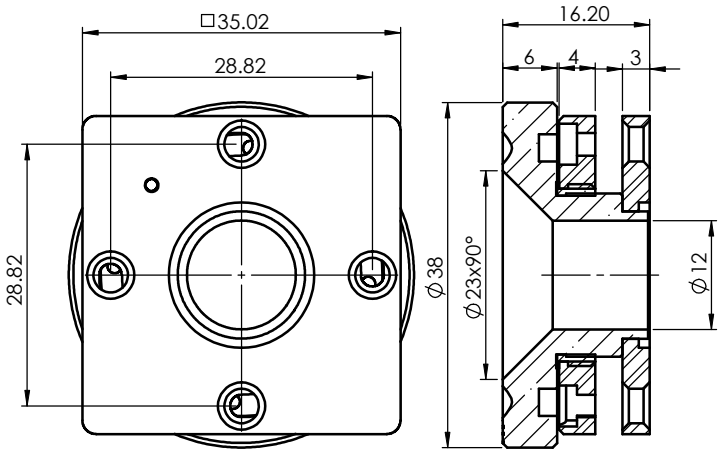

RETENTION FRAME

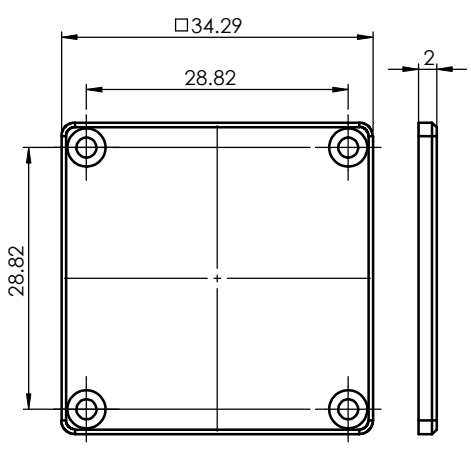

ASSEMBLY BOARD

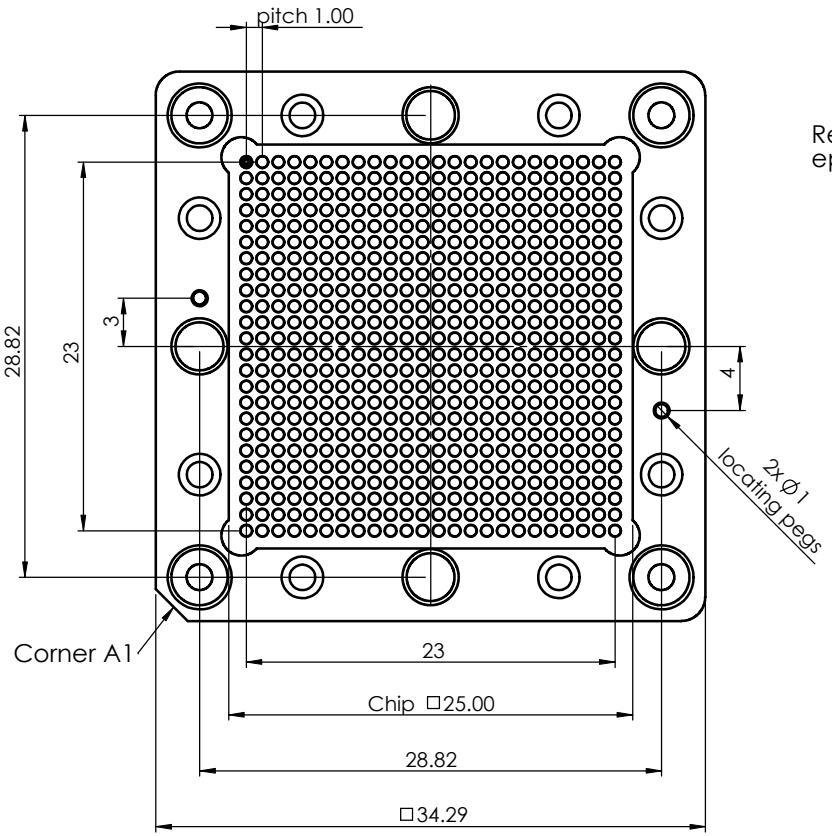

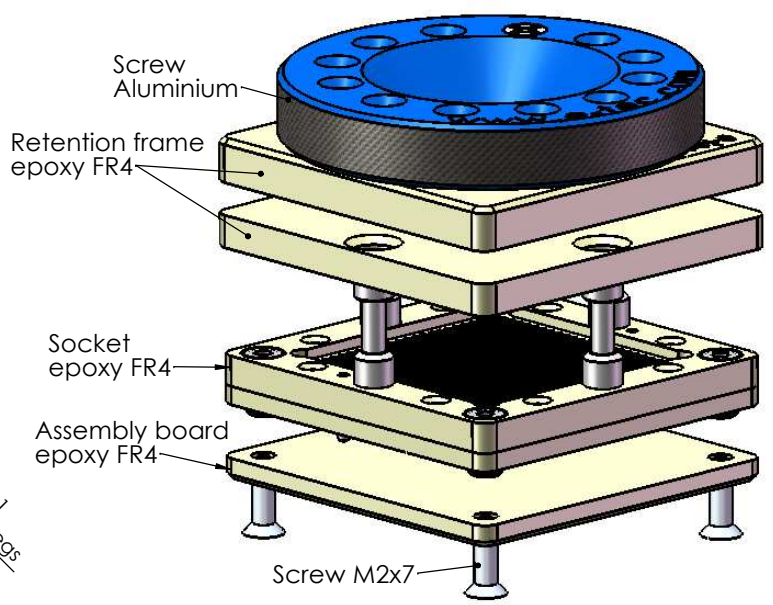

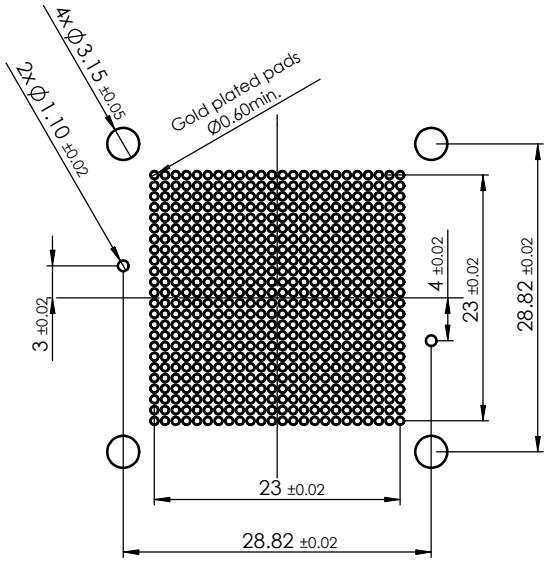

PCB LAYOUT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: GENERAL TOLERANCES ISO 2768m	Remark: BGA FastLock socket, 576 pins, Pitch 1.00mm, matrix 24x24 Retention frame,Solderless					E-tec Interconnect www.e-tec.com
Patented		Visa	Date	Drawn by	Date	Visa
DRAWN		sme	27.08.2010	sme	27.08.2010	Designed and manufactured by **www.happ.ch**
CHK'D						
APPV'D		sme	27.08.2010	Echelle: 3:1		"E-tec order code" **BPF576-1090-24AA55L** A3H
				MATERIAL: .		"Production code" BPF0576-10-09542-24AAA-L 0 Revision
The information contained in this drawing is proprietary to Etec and shall not be reproduced or disclosed in whole or in part or used for any design or manufacture except whe such user possesses direct, written authorization from Etec				WEIGHT:		SHEET 1 OF 1